

Features

- Transient protection for single line
IEC 61000-4-2 (ESD) $\pm 30\text{kV}$ (Air)
 $\pm 30\text{kV}$ (Contact)
IEC 61000-4-5 (Surge) 42A (8/20 μs)
- For 12V and below operating voltage
- Protects one data, control or power line
- Capacitance: 400pF (Typical)
- Low leakage current: 0.01 μA @ V_{RWM} (Typical)
- Low clamping voltage
- Each I/O pin can withstand over 1000 ESD strikes for $\pm 8\text{kV}$ contact discharge

Description

SYS02V12AMC is a single line Transient Voltage Suppressor (TVS) designed to provide electrostatic discharge (ESD) protection for cell phones, notebook computers, PDA's. The SYS02V12AMC is designed to protect sensitive semiconductor components from damage or upset due to electrostatic discharge (ESD) and other over-current transient events. It complies with IEC 61000-4-2 (ESD)($\pm 30\text{kV}$ air, $\pm 30\text{kV}$ contact discharge), IEC 61000-4-5 (Surge) 42A (8/20 μs), very fast charged device model (CDM) ESD and cable discharge event (CDE), etc.

SYS02V12AMC is in SOD-323 package with working voltage of 12 volts. SYS02V12AMC can protect unidirectional line. It offers system designers flexibility to protect single data line, and it can be used to meet the ESD immunity requirements of IEC 61000-4-2, Level 4 ($\pm 15\text{kV}$ air, $\pm 8\text{kV}$ contact discharge). SYS02V12AMC has wide applications.


Applications

- Power supply protection
- Power management
- Desktops, Servers and Notebooks
- Cellular Phones
- Cell Phone Handsets and Accessories
- Microprocessor based equipment
- Personal Digital Assistants (PDA's)
- Portable Instrumentation
- Pagers Peripherals


Mechanical Characteristics

- SOD-323 package
- Flammability Rating: UL 94V-0
- Marking: Device code, date code
- Packaging: Tape and Reel

Circuit Diagram



Pin Configuration

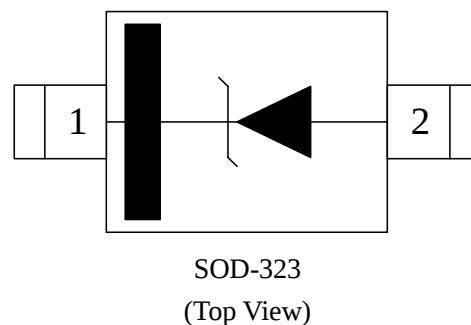


Absolute Maximum Rating

Symbol	Parameter	Value	Units
I_{PP}	Peak Pulse Current ($t_p=8/20\mu s$)	42	A
P_{PK}	Peak Pulse Power ($t_p=8/20\mu s$)	1000	Watts
V_{ESD}	ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	± 30 ± 30	kV
T_{OPT}	Operating Temperature	-45/+125	°C
T_{STG}	Storage Temperature	-55/+150	°C

Electrical Characteristics ($T_A = 25^\circ C$)

Symbol	Parameter
V_{RWM}	Nominal Reverse Working Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Reverse Breakdown Voltage @ I_T
I_T	Test Current for Reverse Breakdown
V_C	Clamping Voltage @ I_{PP}
I_{PP}	Maximum Peak Pulse Current
C_{ESD}	Parasitic Capacitance
V_R	Reverse Voltage
f	Small Signal Frequency
I_F	Forward Current
V_F	Forward Voltage @ I_F

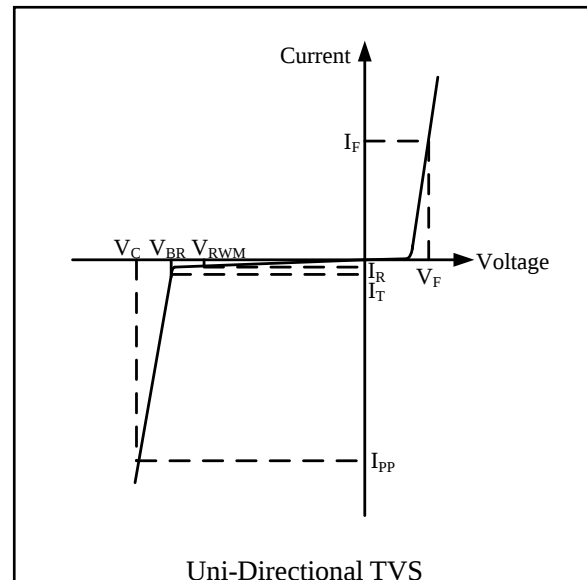


Symbol	Test Condition	Minimum	Typical	Maximum	Units
V_{RWM}				12.5	V
I_R	$V_{RWM} = 12V, T_A = 25^\circ C$ Pin1 to Pin2		0.01	0.1	μA
V_{BR}	$I_T = 1mA$ Pin1 to Pin2	13.3		17	V
V_F	$I_F = 1mA$ Pin2 to Pin1	0.4		1.2	V
V_C^1	$I_{PP} = 42A, t_p = 8/20\mu s$		25	31	V
C_{ESD}^1	$V_R = 0V, f = 1MHz$		400	450	pF


NOTES

¹Guaranteed by design and not subject to production test.


TLP Curve

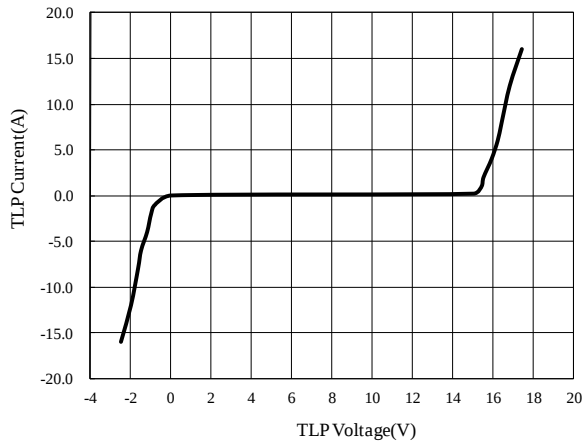


Capacitance vs. Reverse Voltage

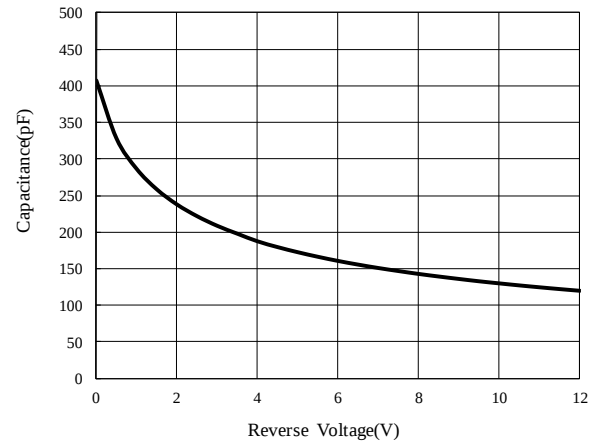


8/20 μ s Pulse Waveform

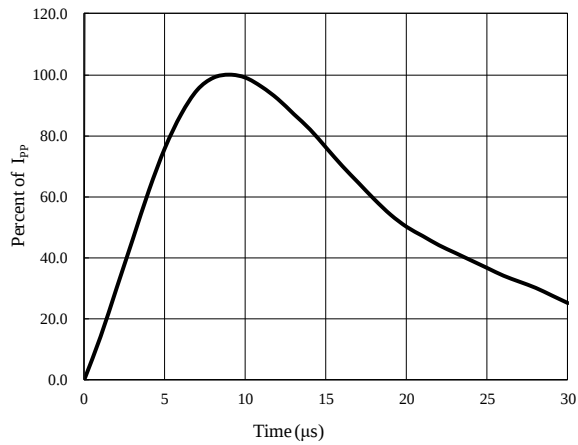


Clamping Voltage vs. Peak Pulse Current

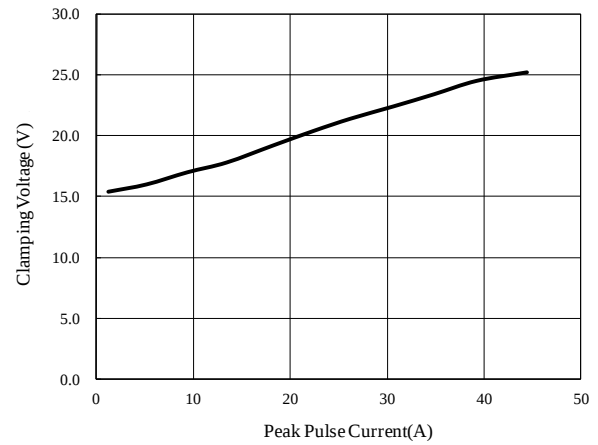

**ESD Clamping of I/O to GND
(+8kV Contact per IEC 61000-4-2)**

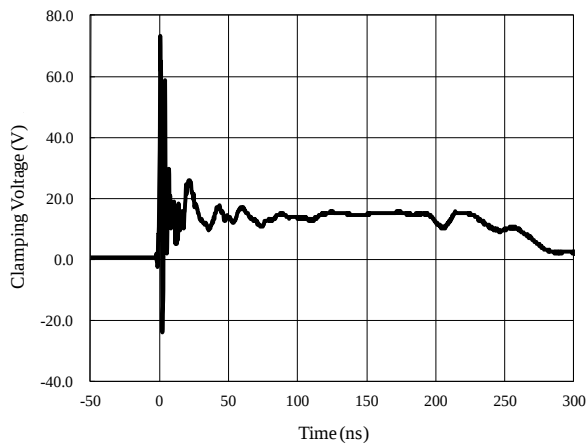


**ESD Clamping of I/O to GND
(-8kV Contact per IEC 61000-4-2)**

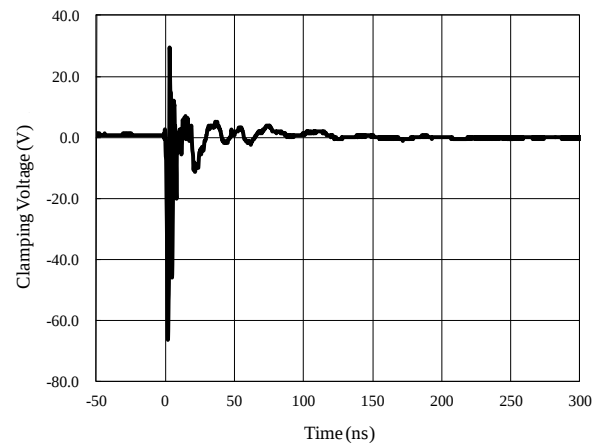


Package Outline


- SOD-323 package

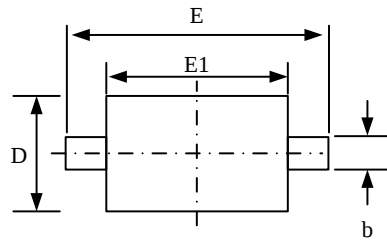

TOP VIEW



SIDE VIEW

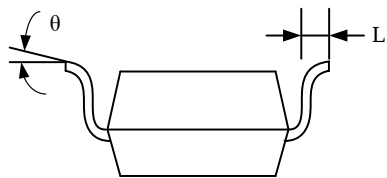


SIDE VIEW

Package Dimensions

Symbol	Dimensions (mm)	
	Minimum	Maximum
A	0.80	0.90
A1	0.90	1.00
b	0.25	0.35
D	1.20	1.40
E	2.50	2.70
E1	1.60	1.80
L	0.25	0.40
θ	0°	8°

Notes: All dimension in mm and exclude mold flash & metal burr.


Tape and Reel Specification

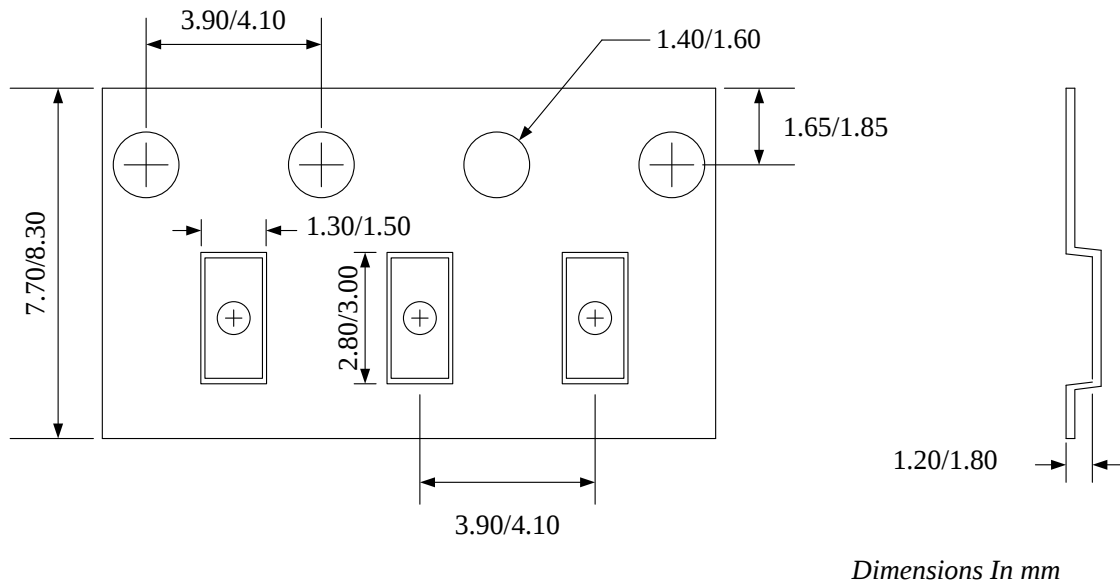

Feeding direction →

Package types	Tape width (mm)	Pocket pitch(mm)	Reel size (Inch)	Trailer * length(mm)	Leader * length (mm)	Qty per reel (pcs)
SOD-323	8	4	7"	400	160	3000

Marking Codes



Note:

- (1) "D" is the device code.
- (2) "M" is month code. "A" is lot number.

Ordering Information

Part Number	Working Voltage	Quantity Per Reel	Reel Size
SYS02V12AMC	12V	3,000	7 Inch



Revision History

The revision history provided is for informational purpose only and is believed to be accurate, however, not warranted. Please make sure that you have the latest revision.

Revision Number	Revision Date	Description
0.9	Aug.01, 2019	Initial Release
1.0	Aug.01, 2020	Production Release



IMPORTANT NOTICE

1. **Right to make changes.** Silergy and its subsidiaries (hereafter Silergy) reserve the right to change any information published in this document, including but not limited to circuitry, specification and/or product design, manufacturing or descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products are sold subject to Silergy's standard terms and conditions of sale.
2. **Applications.** Application examples that are described herein for any of these products are for illustrative purposes only. Silergy makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Buyers are responsible for the design and operation of their applications and products using Silergy products. Silergy or its subsidiaries assume no liability for any application assistance or designs of customer products. It is customer's sole responsibility to determine whether the Silergy product is suitable and fit for the customer's applications and products planned. To minimize the risks associated with customer's products and applications, customer should provide adequate design and operating safeguards. Customer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Silergy assumes no liability related to any default, damage, costs or problem in the customer's applications or products, or the application or use by customer's third-party buyers. Customer will fully indemnify Silergy, its subsidiaries, and their representatives against any damages arising out of the use of any Silergy components in safety-critical applications. It is also buyers' sole responsibility to warrant and guarantee that any intellectual property rights of a third party are not infringed upon when integrating Silergy products into any application. Silergy assumes no responsibility for any said applications or for any use of any circuitry other than circuitry entirely embodied in a Silergy product.
3. **Limited warranty and liability.** Information furnished by Silergy in this document is believed to be accurate and reliable. However, Silergy makes no representation or warranty, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. In no event shall Silergy be liable for any indirect, incidental, punitive, special or consequential damages, including but not limited to lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges, whether or not such damages are based on tort or negligence, warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Silergy's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Standard Terms and Conditions of Sale of Silergy.
4. **Suitability for use.** Customer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of Silergy components in its applications, notwithstanding any applications-related information or support that may be provided by Silergy. Silergy products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Silergy product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Silergy assumes no liability for inclusion and/or use of Silergy products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.
5. **Terms and conditions of commercial sale.** Silergy products are sold subject to the standard terms and conditions of commercial sale, as published at <http://www.silergy.com/stdterms>, unless otherwise agreed in a valid written individual agreement specifically agreed to in writing by an authorized officer of Silergy. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Silergy hereby expressly objects to and denies the application of any customer's general terms and conditions with regard to the purchase of Silergy products by the customer.
6. **No offer to sell or license.** Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights. Silergy makes no representation or warranty that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right. Information published by Silergy regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from Silergy under the patents or other intellectual property of Silergy.

For more information, please visit: www.silergy.com

© 2019 Silergy Corp.

All Rights Reserved.